

ELEN

USER MANUAL



UM_EN
Date: 1764216_01

EXPOBAR®

Original instruction

CONTENT	2
SYMBOL DESCRIPTION	4
Hazard intensity levels	4
GENERAL	5
Introduction	5
General instructions.....	5
Warnings.....	5
Precautions.....	6
Intended use.....	6
TECHNICAL SPECIFICATIONS.....	7
Elen mini.....	7
Accessories.....	7
Elen display control 2GR.....	8
Accessories.....	8
Elen display control 3GR.....	9
Accessories.....	9
OVERVIEW OF COMPONENTS	10
Elen mini control	10
Elen display control 2GR	11
Elen display control 3GR.....	12
DIMENSION SKETCH.....	13
Elen mini.....	13
Elen display control 2GR.....	14
Elen display control 3GR.....	15
TRANSPORT	16
Packaging.....	16
Delivery inspection.....	16
INSTALLATION.....	16
Positioning.....	16
Electrical installation.....	17
Connection types.....	17
Water connection	18
Pressure and temperature.....	18
Starting the machine.....	18
The porta-filter set.....	19
Inserting the porta-filter in the group.....	19
OPERATION.....	20
Espresso brewing.....	20

Steaming and frothing milk	21
Dispensing hot water	22
CLEANING AND MAINTENANCE	23
Coffee machine cleaning.....	23
Daily cleaning	23
Weekly cleaning	23
Cleaning the brewing group and porta-filter.....	24
Cleaning the gasket and shower plate	25
Additional handling of the machine.....	26
STORAGE AND DISPOSAL OF MACHINE	26
How to store the machine	26
Disposal of machine	26
PROGRAMMING	27
Buttons functions.....	27
Additional button functions.....	27
Programming the coffee dosage	28
PROGRAMMING USING THE DISPLAY	29
Machine status	29
Accessing the second menu level.....	30
Setting the clock: hours, minutes and day.....	30
Auto On/Off.....	31
Counters	31
MESSAGES AND ALARMS.....	32
TROUBLESHOOTING	33

Notification intensity levels

There are four different levels of notification intensity within this manual, as identified by signal words DANGER, WARNING, IMPORTANT, and NOTE. The level of risk and importance of the notification is determined by the following definitions. Always observe the warnings to ensure safety and prevent potential injury and product damage.



Important:

Alerts against unsafe practices. Observe *Important* notifications to ensure food safety, prevent possible minor personal injury, or damage to the machine.



WARNING:

Indicates a potentially hazardous situation which, if the **WARNING** is ignored, could result in serious injury or even death.



DANGER:

INDICATES A IMMINENTLY HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, WILL LIKELY RESULT IN SERIOUS INJURY AND EVEN DEATH.



Note:

Gives additional information which may be helpful during the operation, routine maintenance, and cleaning of the machine.

Introduction

Thank you for choosing an Elen espresso machine.
We hope you enjoy it !

- Read the user manual before using the machine.
- This manual contains important instructions on intended and safe use of the coffee machine.
- Keep this manual close to hand for future reference. If damaged or lost, request a copy from the manufacturer.

General instructions

- Machine installation and certain maintenance operations should only be performed by qualified service personnel.
- All safety instructions and warnings contained in this manual should be observed at all times to ensure safe installation, use, and maintenance.
- Do not attempt to remove covers or safety shields to access the interior of this machine or make repairs. Repairs should be made by an authorised technician or service centre.
- Owners are liable for ensuring that users have been properly trained to operate the machine and understand the potential risks involved.
- The owner or installer will be liable for all non-authorized modification of the machine.
- Non-authorized alteration or modification of the machine will immediately void the manufacturer's warranty.
- This manual references the machine at the time of sale. The commercial availability of subsequent versions including modifications, upgrades or adaptations does not oblige the manufacturer to apply any changes to this machine, nor is it obliged to update the documentation supplied.
- The manufacturer reserves the right to withdraw currently available manuals whenever deemed appropriate and reasonable.
- Periodically, some updates and changes may be required for this machine. In this event, a technician will be responsible for ensuring the change is made in accord with manufacturer's specifications.

Warnings

Note: The manufacturer is not liable for damage to persons or property resulting from failure to follow the instructions and warnings listed below when installing and using this machine.

- Install the machine in a horizontal position and away from heat sources and flammable objects.
- This machine should only be installed on a water-resistant work surface that is capable of adequately supporting the machine's weight.
- Place the machine in a location accessible only to personnel trained to operate it.
- Keep all hazardous packaging materials, such as plastic bags, styrofoam, and staples, out of reach of children.
- Plug the machine into a properly installed, earth grounded electrical outlet with line voltage that matches the specifications for the machine.
- Ensure that the power supply voltage does not fluctuate by more than 6%.
- Position the power cable so that users cannot trip over it. Keep the power cable away from sharp edges and heat sources.
- Children should never be allowed to play with the machine.
- This appliance is not suitable for installation in an area where a pressure washer may be used.
- Do not use the machine outdoors, where it would be exposed to severe weather or extreme temperatures.
- If the power cable is damaged, it may only be replaced by the manufacturer or its approved service technician.
- Do not remove or disable any of the mechanical, electrical, or thermal protection safety equipment.

- In case of emergency, (e.g., the machine catches fire or becomes unusually hot or noisy), disconnect the power immediately and turn off the water supply.
- If the machine is not going to be used for an extended period of time, disconnect the power. When disconnecting the power, pull the plug rather than the cable.
- When packed for storage, store the machine in a dry place with an ambient temperature above 5°C. Boxes may be stacked up to three units high of the same model. Do not place other heavy items on top of the box.
- If the machine is likely to be exposed to temperatures below 0 °C during handling and transport, make sure that service personnel empty the boiler and water system. (The machine's boiler and water system is empty when delivered from the factory.)
- To ensure fault-free machine operation, only use manufacturer-approved replacement parts and accessories.

Precautions

- Before performing maintenance and/or moving the machine, disconnect the machine from the power supply and wait for it to cool down.
- Do not place any liquids on the machine.
- This appliance must not be cleaned with a pressure washer.
- Never immerse the machine, plug or power cable in water, as there is a risk of electric shock.
- Do not touch the machine's hot surfaces or dispensing equipment.
- Do not touch the machine if your hands or feet are wet.
- Do not operate the machine if any part except the dispensing equipment is wet.
- Place the machine out of reach of children.
- This appliance can be used by children from age 8 and above and persons with reduced physical, sensory, or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- Children shall not play with the appliance.
- Cleaning and user maintenance shall not be made by children without supervision.
- Do not use the machine if the power cable or plug is damaged, or the machine has been dropped. Contact a service technician for repairs or to ensure that it is safe for use.
- Do not block the vents with rags or other objects.
- Do not insert foreign objects into the vents.
- Check the drain regularly to make sure that waste water is emptying properly.






Intended use

- The coffee machine has been designed and manufactured to make espresso coffee and other hot drinks (e.g., steaming and frothing milk). Do not use it for any other purpose.
- The machine is intended to be used by trained personnel for preparing foodstuffs.
- This machine is not intended for use in industrial kitchens, domestic kitchens, or similar locations.
- The manufacturer will not be held liable for damage to persons or property due to incorrect, improper or negligent use by non-professional personnel.
- To ensure optimal performance, install the machine in a location where these parameters will not be exceeded:
 - Maximum permissible inlet water pressure: 600 KPa (6 Bar)
 - Minimum permissible inlet water pressure: 200 KPa (2 Bar)
 - Maximum inlet water temperature: 40°C
 - Ambient temperature is between +10°C (min.) and +40°C (max.).

Elen MINI Control

SPECIFICATIONS	Elen MINI	
	Mini control 1GR	Mini control 2GR
Machine model, Standard	-	-
Machine model, Take Away	-	-
Steam wand	1 unit	1 unit
Hot water outlet	1 unit	1 unit
Temperature control	Regulated by pressure switch	Regulated by pressure switch
Temperature control by group	No	No
Programmed via display	No	No
Dispensing system for tall cups	Optional	Optional
Energy saving mode	No	No
Height, width, depth (mm)	530, 460, 590	530, 460, 590
Boiler volume (L)	6	6
Power supply	220-240V 1N~ 2800 W 50-60 Hz	220-240V 1N~ 2800 W 50-60 Hz
Water connection	Female 3/8" thread	Female 3/8" thread
Machine weight (kg)	36.40	41.50
Steam boiler operating pressure	Between 0.8 and 1.2 bar	Between 0.8 and 1.2 bar
Ambient noise	< 70 db	< 70 db






Accessories

MODEL	2-spout porta-filter	1-spout porta-filter	55cm inlet hose	Cleaning membrane	Drainage tube (150cm)
					
Mini 1GR	1 unit	1 unit	1 unit	1 unit	1 unit
Mini 2GR	1 unit	1 unit	1 unit	1 unit	1 unit

Elen Display Control 2GR

SPECIFICATIONS	Elen 2GR	
	Display control	3 Boilers display control
Machine model, Standard	EBEE-D41B-12AE 220-240V 1N~ 3350W	-
Machine model, Take Away	EBEE-D41B-22AE 220-240V 1N~ 3350W	-
Steam wand	2 units	2 units
Hot water outlet	1 unit	1 unit
Temperature control	PID regulation	PID regulation
Temperature control by group	No	Yes
Programmed via display	Yes	Yes
Dispensing system for tall cups	Optional	Optional
Energy saving mode	Yes	Yes
Height, width, depth (mm)	530, 680, 590	530, 680, 590
Boiler volume (L)	11.5	11.5 + 1.5 + 1.5
Power supply	220-240V 1N~ 3350W 50-60Hz	220-240V 1N~ 3740W 50-60 Hz
		400V 3N~ 4790 W 50-60 Hz
		220-240V 3~ 4790 W 50-60 Hz
Water connection	Female 3/8" thread	Female 3/8" thread
Machine weight (kg)	51.90	60.70
Steam boiler operating pressure	Between 0.8 and 1.2 bar	Between 0.8 and 1.2 bar
Ambient noise	< 70 db	< 70 db






Accessories

MODEL	2-spout porta-filter	1-spout porta-filter	55cm inlet hose	Cleaning membrane	Drainage tube (150cm)
					
2GR	2 units	1 unit	1 unit	1 unit	1 unit
2GR 3 Boilers	2 units	1 unit	1 unit	1 unit	1 unit

Elen Display Control 3GR


SPECIFICATIONS	Elen 3GR	
	Display control	3 Boilers display control
Machine model, Standard	-	-
Machine model, Take Away	-	-
Steam wand	2 units	2 units
Hot water outlet	1 unit	1 unit
Temperature control	PID regulation	PID regulation
Temperature control by group	No	Yes
Programmed via display	Yes	Yes
Dispensing system for tall cups	Optional	Optional
Energy saving mode	Yes	Yes
Height, width, depth (mm)	530, 980, 590	530, 980, 590
Boiler volume (L)	17.5	17.5 + 1.5 + 1.5 + 1.5
Power supply	400V 2N~ 4290 W 50-60 Hz	-
	400V 3N~ 6290 W 50-60 Hz	400V 3N~ 6290 W 50-60 Hz
	220-240V 3~ 4290 W 50-60 Hz	220-240V 3~ 4290 W 50-60 Hz
Water connection	Female 3/8" thread	Female 3/8" thread
Machine weight (kg)	51.90	60.70
Steam boiler operating pressure	Between 0.8 and 1.2 bar	Between 0.8 and 1.2 bar
Ambient noise	< 70 db	< 70 db

Accessories

MODEL	2-spout porta-filter	1-spout porta-filter	55cm inlet hose	Cleaning membrane	Drainage tube (150cm)
3GR	 3 units	 1 unit	 1 unit	 1 unit	 1 unit
3GR 4 Boilers	3 units	1 unit	1 unit	1 unit	1 unit


Front view

Elen mini control

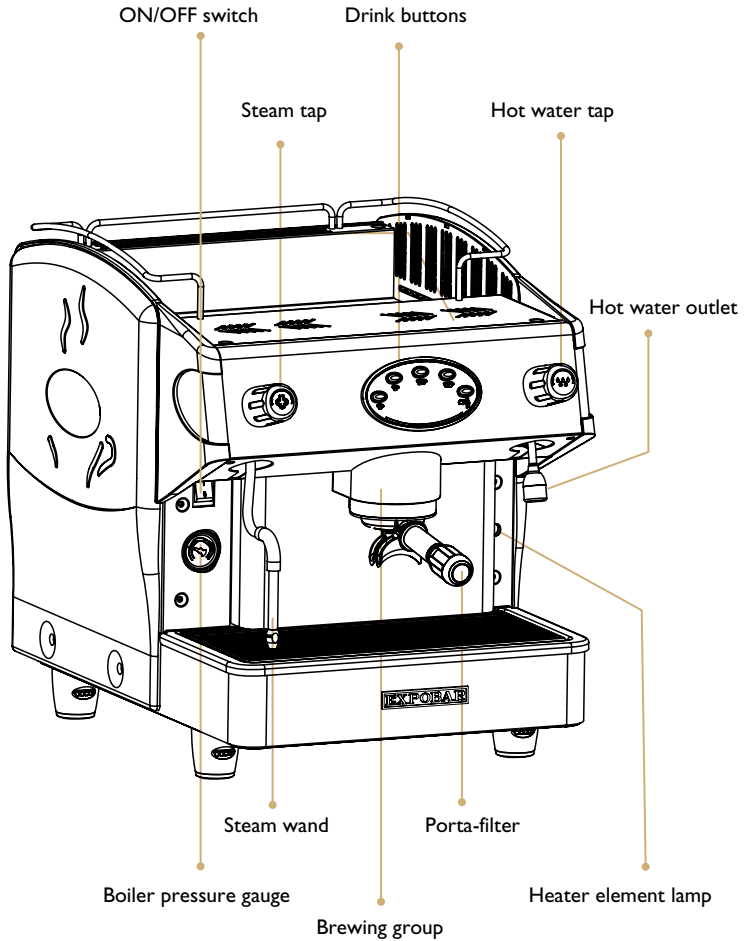


Front view

Elen display control 2GR

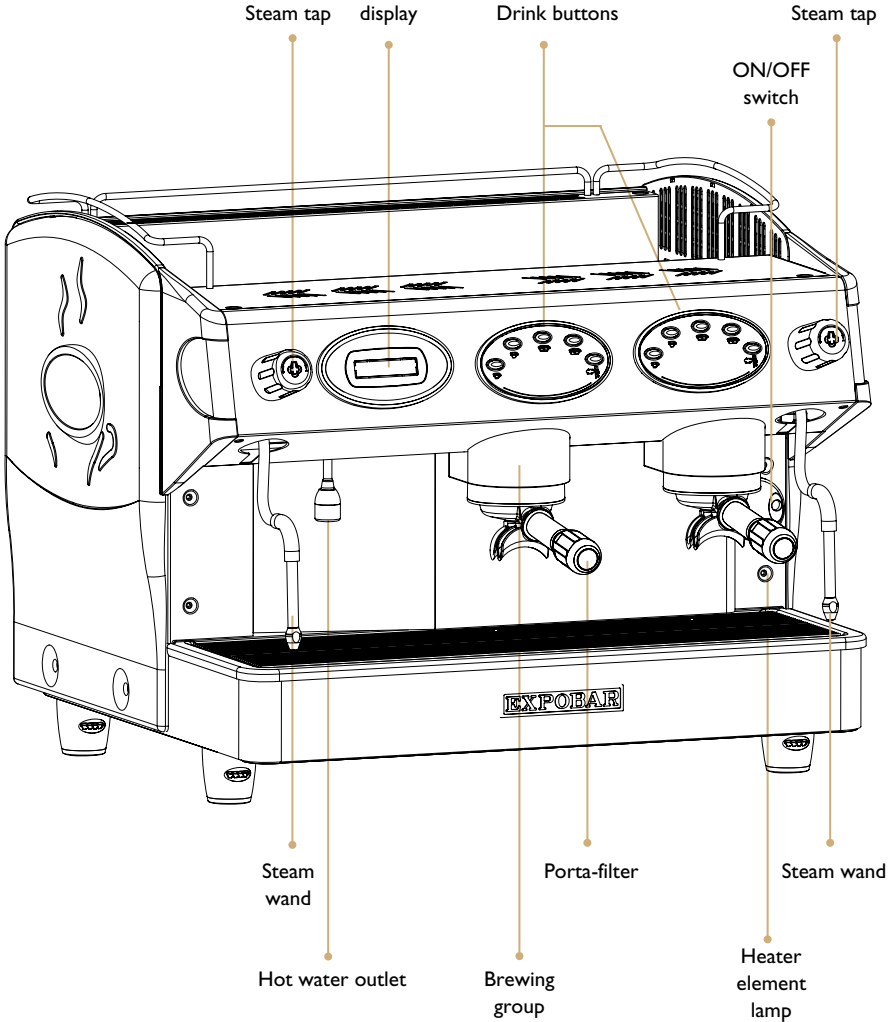


Front view of the machine

Elen display control 3GR

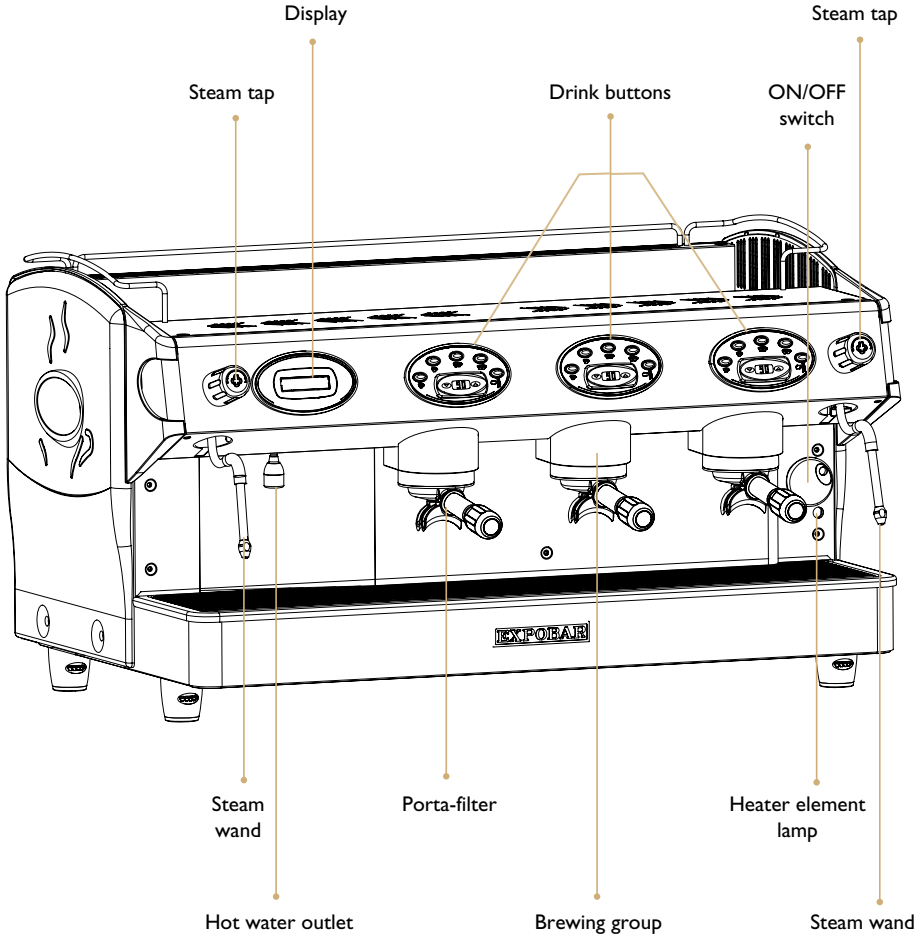


Elen mini

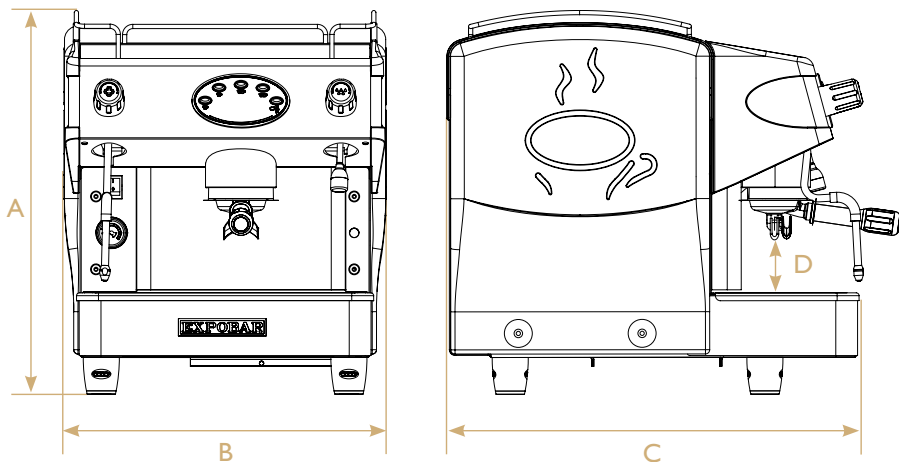


MODEL	A	B	C	D
Elen mini 1Gr	550 mm	460 mm	590 mm	74 mm
Elen mini 1Gr Tall Cup	550 mm	460 mm	590 mm	124 mm
Elen mini 2Gr	550 mm	460 mm	590 mm	74 mm
Elen mini 2Gr Tall Cup	550 mm	460 mm	590 mm	124 mm

Elen display control 2GR

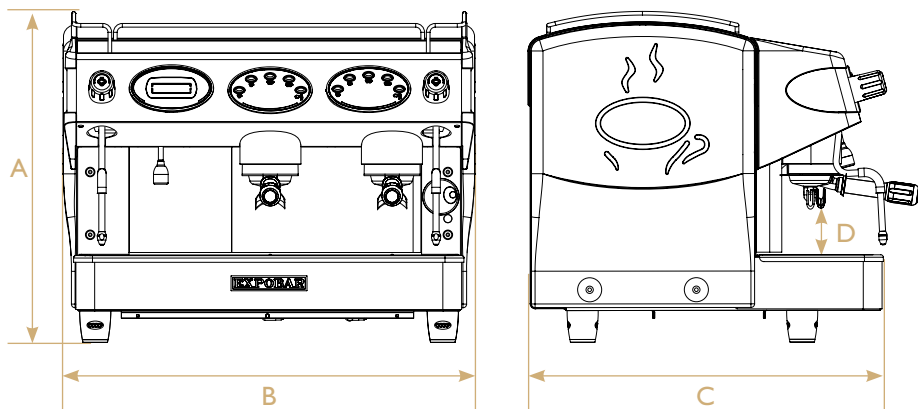

Model	A	B	C	D
Elen 2Gr	550 mm	680 mm	590 mm	74 mm
Elen 2Gr Tall Cup	550 mm	680 mm	590 mm	124 mm
Elen 2Gr 3 Boilers	550 mm	680 mm	590 mm	74 mm
Elen 2Gr 3 Boilers Tall Cup	550 mm	680 mm	590 mm	124 mm

Elen display control 3GR

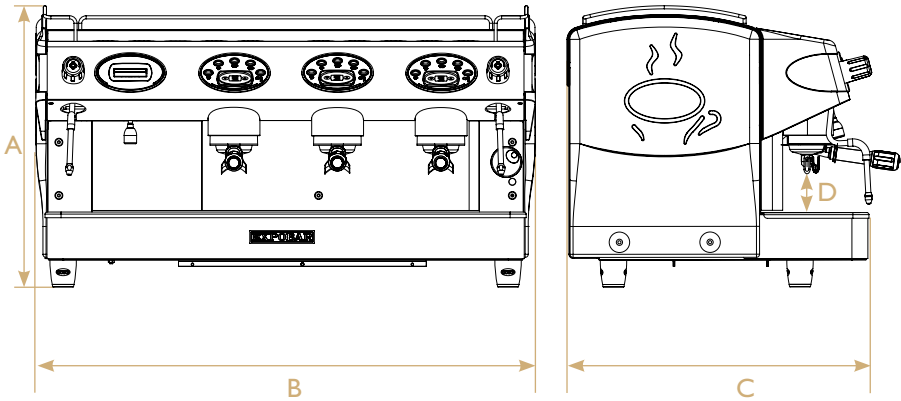

Model	A	B	C	D
Elen 3Gr	550 mm	980 mm	590 mm	74 mm
Elen 3Gr Tall Cup	550 mm	980 mm	590 mm	124 mm
Elen 3Gr Boilers	550 mm	980 mm	590 mm	74 mm
Elen 3Gr 4 Boilers Tall Cup	550 mm	980 mm	590 mm	124 mm

Packaging


- The machine is shipped in a custom-designed carton which utilizes model-specific polystyrene cushions to protect it from damage.
- The machine's carton features standardized handling symbols to explain proper shipping and storage methods.
- The machine must remain in a horizontal position during the transport. Do not store or handle the machine except on its feet.
- During transport protect the carton and machine from impact drops, crushing, shocks, moisture and exposure to extreme temperature.

Delivery inspection

- Upon receipt and delivery ensure that the machine is in the exact condition described in the enclosed documentation, and that all accessories are included. Missing items should be reported to the manufacturer or dealer immediately.
- Damage caused during transport should be reported to the shipping agent and the machine's distributor immediately.
- Packaging materials are potentially dangerous and should be kept away from children.
- The carton and all packing materials are recyclable and should be returned to a recycling center for disposal.

INSTALLATION

Positioning

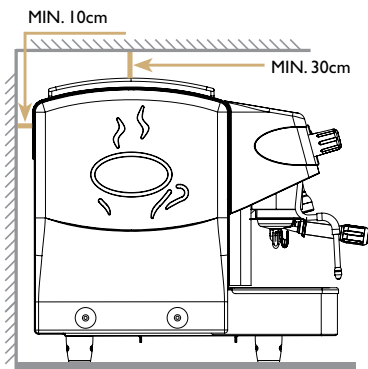

- Install the machine on a level, sturdy, and water-resistant surface approximately 110cm above floor level for ease of access and usage.
- Adjust the feet to ensure that it dispenses coffee evenly to all cups.
- Ensure enough free space is available above (>30cm) and behind (>10cm) the machine to ensure easy cleaning and maintenance and adequate ventilation.
- Do not install the machine if it is wet or damp. Allow it to dry completely and ask a service technician to ensure that none of the electrical components have been affected.



Note:

Leave an air gap of approximately 30cm above the machine and 10cm behind it to ensure adequate ventilation.

Electrical installation



The machine should only be connected to the power supply by qualified personnel. The following safety instructions should be obeyed at all times:

- Ensure that the electrical requirements stated on the TECHNICAL SPECIFICATIONS (pages 7 - 8) match the specifications of the power supply at the outlet.
- Ensure that the domestic electrical supply where the machine is being installed is rated for and able to provide the power required by the machine. Insufficient power supply, wiring, grounding, or insulation can result in overheating and possibility of fire.
- The coffee machine must be connected to an earth grounded electrical outlet that complies with the regulations in force in the country of installation.
- Ensure that a circuit breaker engineered for the power consumption of the machine is installed to protect the domestic electrical supply, as specified on the ratings plate located under the drip tray.
- Do not connect the machine to the domestic power supply via extension cords, plug adapters, or shared outlets.

The manufacturer will not be held liable for damage to persons, animals or property resulting from incorrect installation of the coffee machine.




DANGER!

If the power cable or plug is damaged, it must be replaced by the manufacturer, distributor, or its approved service technician in order to avoid **RISK OF SERIOUS INJURY OR DEATH!**

Connection types

- Connect the machine according to the specification on the ratings plate located under the drip tray.

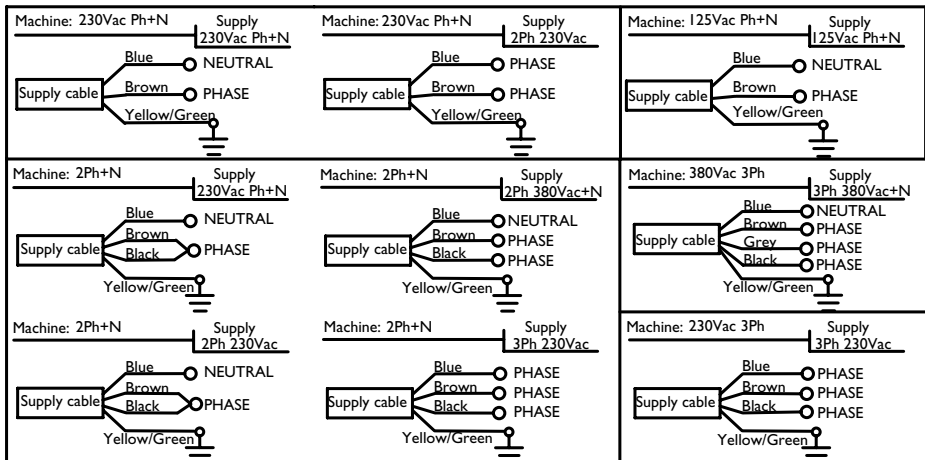

Water connection

- Connecting the machine to the domestic water supply must be performed by a qualified person.
- Purge at least 20 liters of water from the domestic water supply before connecting the machine to it to flush out any debris that may be in the plumbing system that would otherwise accumulate inside the boilers.
- The domestic plumbing system should be fitted with a brass 3/8" NPT male pipe fitting and an in-line shut-off valve. Connect the 180cm water inlet hose included with the machine to the domestic water supply and tighten the line fittings with a wrench to 15 ft. lbs. / 20N-m.
- Only use safe drinking water with a hardness rating between 5°fH and 8°fH (French hardness degrees) or 20 to 32 ppm (parts per million as calcium). If the hardness value is below this limit, corrosion of hydraulic components is likely. If the value is higher, lime-scaling inside the boiler will occur. In both cases, the proper function of the machine and quality and taste of the coffee will be negatively affected.
- If necessary, connect the machine to a water softener to reduce water hardness using the flexible 55cm hose included in the accessory box.
- Connect one end of the corrugated drain tube to the drain cup in the machine, connect the other end to the plumbing drainage system in the installation area.




Important:


- Only use the hoses supplied with the machine. Never reuse damaged hoses.
- Ensure that the drainage tube is not twisted and that it is below the level of the drain cup.

Pressure and temperature

- Boiler pressure is directly controlled by water temperature (fig. 01).
- This machine is fitted with a pressure gauge that displays the boiler pressure, if the machine is equipped with a digital display it will also indicate water temperature.

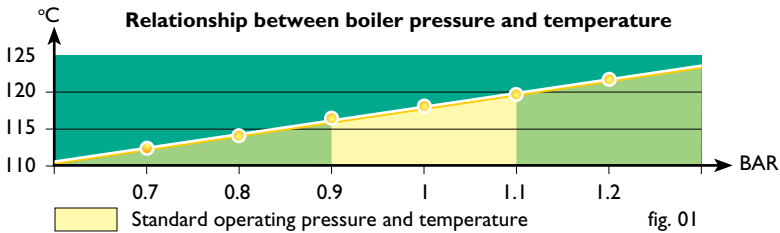


Starting the machine

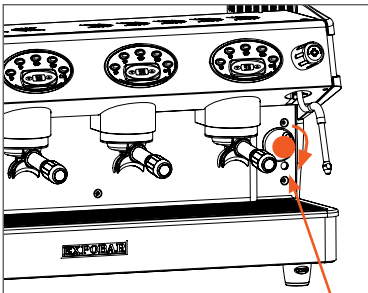


Main power switch

- Open the machine's water supply valve.
- Turn on the main power switch.
- Press a drink button at the control panel on each group, wait until water comes out continuously from each of them. This ensures that the heat exchangers in the machine are being correctly filled.
- Open the steam lever to release the air trapped in the boiler.
- The red lamp indicates that the boiler is heating. The lamp switches off automatically when the machine reaches operating temperature.
- The machine is now ready to use.


The porta-filter sets

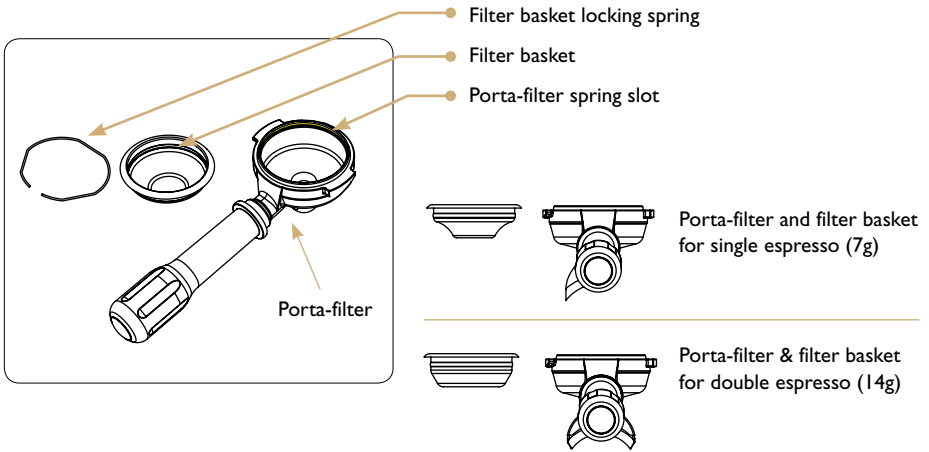

Inserting the porta-filter into the group

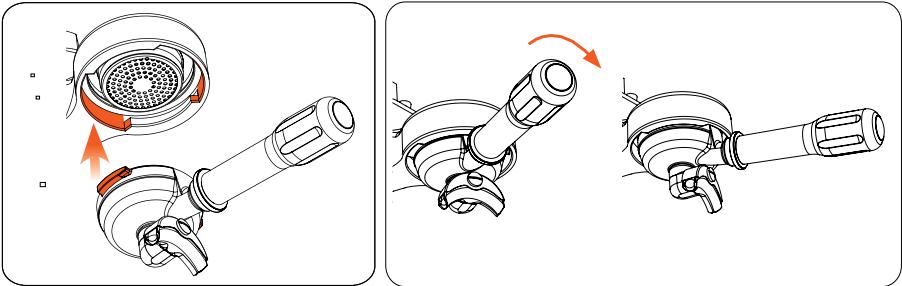


- Align the porta-filter's two flanges with the two slots in the group housing.
- Insert the porta-filter and rotate it counterclockwise until the handle is approximately perpendicular to the face of the coffee machine.

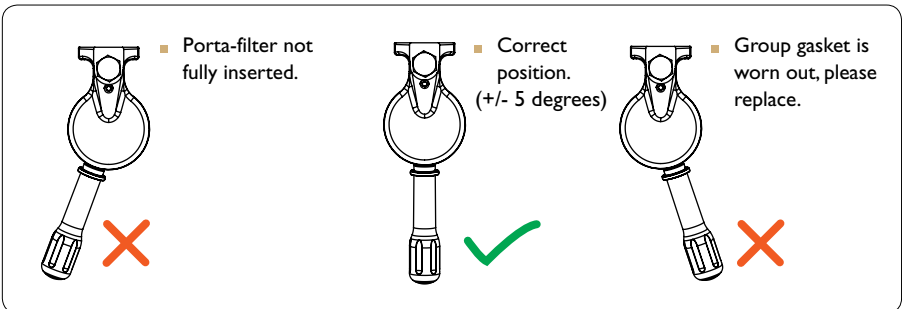


Espresso brewing

**Important:**


Always keep the porta-filter inserted in the group to keep it warm. This is important to maintain an optimal temperature when the espresso is dispensing.




▲ Unlock and remove the porta-filter from the group head.




▲ Fill the filter basket with espresso-grind coffee (amount will differ depending on filter basket size). For best results use only freshly ground espresso beans.




▲ Press the coffee with the coffee tamper.



▲ Insert the filled porta-filter into the group head and lock it into the correct position.



▲ Place the cup(s) under the porta-filter outlet(s).




▲ Select the desired option from the drink buttons.


**WARNING!**

Never try to open the porta-filter while the machine is in operation! The pressurised hot water could cause scalding or serious injury. After dispensing has finished, wait at least 3 seconds before removing the porta-filter.


Steaming and frothing milk with the manual steam wand

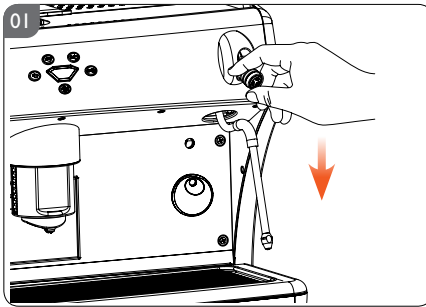


- ▲ Place the steam wand over the drip tray and open the steam lever for a few seconds to allow condensed water to be ejected. Close the steam lever when only steam comes out.

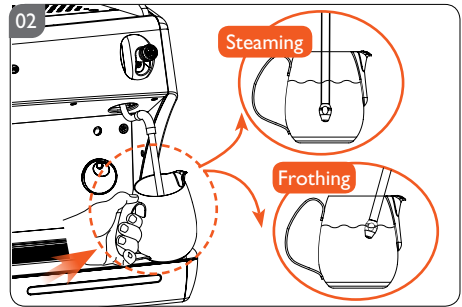

- ▲ Immerse the steam wand into the milk, making sure the wand tip is submerged.

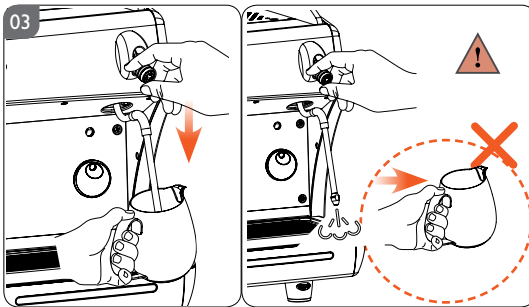

- ▲ Open the steam lever again to begin steaming or frothing the milk. Do not remove the milk pitcher while steaming.

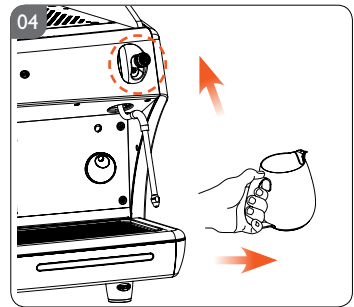


- ▲ Once the milk reaches the desired temperature, close the lever and remove the pitcher.


**WARNING!**

Do not allow the steam wand to extend out of the milk when the lever is open, it may cause serious burns and injuries.

- ▶ After the process is finished, position the steam wand over the drip tray and open the steam lever for a few seconds to eject any milk remaining in the wand. Close the lever and then wipe down the outside of the steam wand with a damp cloth to prevent nozzle blockage and to keep it clean. Leaving milk in or on the wand will affect the taste of later drinks.



Dispensing hot water

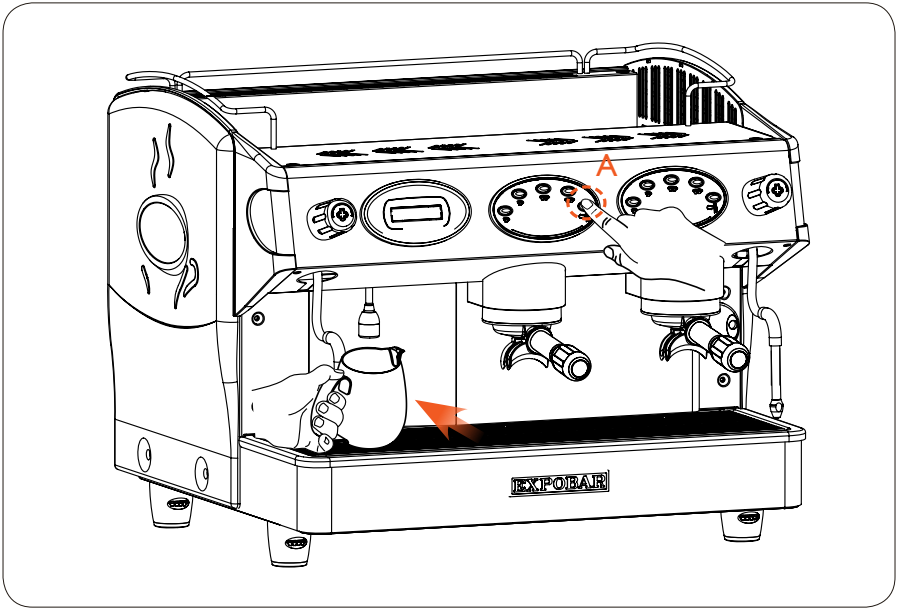

- Place a pitcher (or other heat resistant vessel) under the hot water outlet.
- Press the hot water button (A) for 3 seconds to begin dispensing.
- Wait until the machine stops dispensing hot water automatically, or press the button again to stop hot water dispensing at any time.

**WARNING!**

Never expose hands and fingers directly under the hot water outlet during operation to avoid scalding or serious burns.

Machine cleaning



Important:

- To keep the machine looking and working like new, you should always follow the cleaning and care instructions provided in this manual.
- Always turn off the main power switch when cleaning the exterior of the machine.
- All external surfaces should be cleaned with a damp, lint-free cloth that will not scratch the machine.
- Do not use aggressive cleaning detergents, solvents or degreasers. These can damage the surfaces, and plastic and rubber parts, and leave unwanted residue.



Important:

Each day, or 8 hours after dispensing the last coffee, the following cleaning tasks should be performed to maintain the quality and performance of the water system:

- **Porta-filter:** Brew one espresso with the filter empty (around one minute) to flush it out (dispose of this water).
- **Steam Wand:** Position the wand over the drip tray and open the steam lever for one minute to flush the wand.
- **Hot Water Outlet:** Place a container under the water outlet and open the lever for 20 seconds (dispose of this water).

Daily cleaning schedule



- Rinse each of the brewing groups, shower plates, and porta-filters with hot water for 15 seconds.
- Clean the external surfaces of the machine with a damp cloth, paying special attention to the stainless steel parts.
- Clean the steam wand and the water tap. Be sure that the nozzles are not clogged or partially blocked with milk or other residue. If it's necessary to remove them for cleaning, be careful not to deform or damage any of the components during removal.
- Clean the drip tray and the stainless steel insert grid under running water with a brush.
- Clean the drain cup by slowly pouring one liter of warm water into it to dissolve and remove the coffee residue that accumulates inside the drain cup and hose.

Weekly cleaning schedule

- Clean the brewing group and porta-filter with professional cleaning powder (page 21).

Cleaning the brewing group and porta-filter

- Unlock and remove the portafilter from the group head.
- Place the blind gasket in the filter basket.
- Fill the blind basket with cleaning powder for espresso coffee machines.
- Lock the portafilter into the group head.
- Activate the auto-cleaning program:

When the machine is in idle mode, simultaneously press the Continuous  and I Short Espresso  buttons. After cleaning starts, release the buttons and the machine will automatically repeat the cleaning cycle 5 times until cleaning is completed.



WARNING!

Never try to open the portafilter while the machine is in operation! The pressurised hot water could cause scalding or serious injury. After cleaning has finished, wait about 3 seconds before removing the portafilter.




Important:

When the cleaning process is finished, remove the portafilter and run water through the group again to rinse out any residue. Repeat the cleaning process this time without cleaning powder to remove any remaining residue. Store the blind gasket in a convenient location for future use.



Note:

- Rinse the group and portafilter with hot water (using only the blind gasket and hot water, no cleaning powder) each day.
- Clean the group and portafilter with cleaning powder once a week.

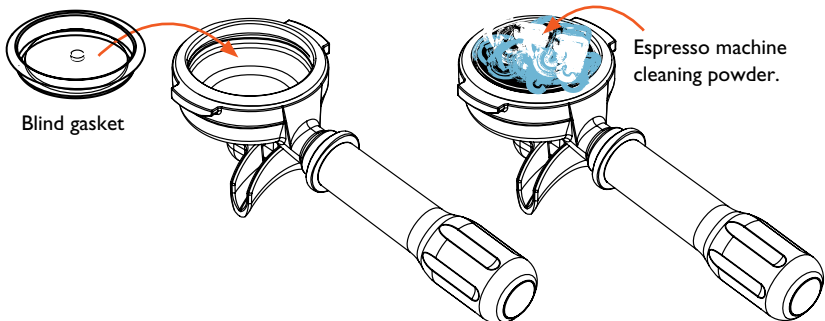

Note:

Only use professional cleaning powder designed specifically for espresso machines. It's available from the distributor.





Part no: 1104162


Cleaning the gasket and shower plate

Cleaning the gasket

While making espresso, coffee grounds will naturally accumulate on the group's sealing surface. Allowing an excessive amount of grounds to build up can prevent the porta-filter from properly sealing to the group head. In extreme cases, such as leaving a used porta-filter in the group head for several days, water can even become blocked from passing through the shower plate.

To prevent these problems, perform the following cleaning procedures daily:

- Install the blind basket into the porta-filter without cleaning powder.
- Place the porta-filter loosely in the group head - do not close it fully.
- Press the Continuous button .
- Perform an opening-closing motion with the porta-filter in place without closing it fully. Water will flow over and around the porta-filter, passing through the closing surface and washing out any coffee residue. Be very careful to avoid splashes, as this water is very hot and can cause burns.
- Press the Continuous button  again to stop the water flow.

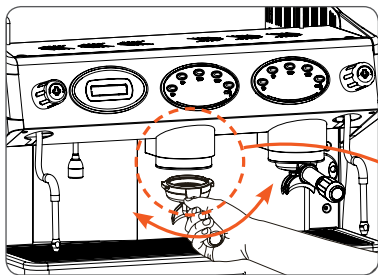

WARNING!

Take special care to avoid scalding when performing this cleaning operation, as the hot water used to clean the gasket will spill over the sides of the porta-filter.




WARNING!


Do not fully tighten the porta-filter. If fully tightened, high-pressure water may spray out and cause scalding or serious injury.

Cleaning the shower plate

- Remove the porta-filter from the group head.
- Clean the shower plate and group gasket with a soft brush to remove any coffee residue.


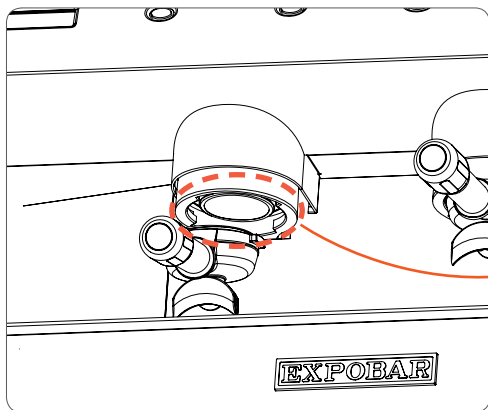


Leftover coffee
requiring cleaning

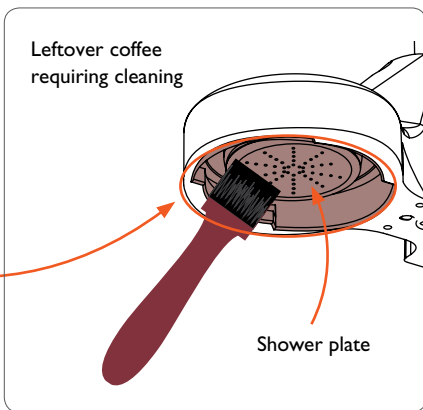

Shower plate

Additional handling of the machine

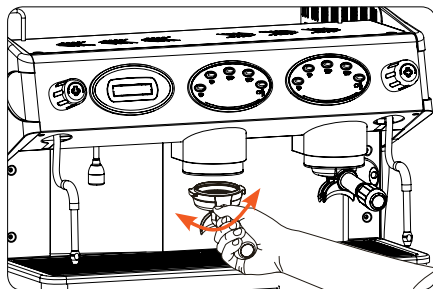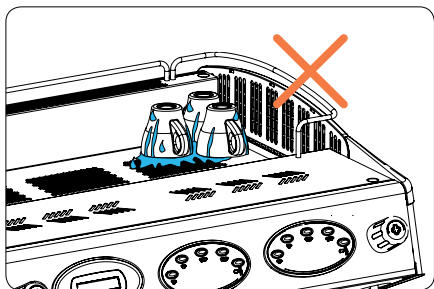

Important:

Do not place wet cups directly on the cup shelf. Allowing water to drip into the machine can cause mechanical and electrical damage.

- Always remove and insert the portafilters gently. Never use excessive force to try to close the portafilter. If the portafilter does not turn and lock into place without excessive force this usually indicates that there is too much coffee in the filter basket.

STORAGE AND DISPOSAL

Long-term storage

Before storage be sure to:

- Perform all weekly and periodic cleaning procedures described in this manual (see pages 16-20).
- Disconnect and roll up the power cord (this should be performed by a qualified person).
- Disconnect the machine's water inlet hose from the domestic water supply and drain the boilers (this should be performed by a qualified person).
- Clean the drip tray and exterior of the machine to remove any coffee or other residue.
- Cover / re-pack the machine in its original carton and store it in a dry place where it will not be exposed to extreme temperatures or humidity.
- When returning the machine to service after long-term storage, perform all weekly and periodic cleaning procedures before use.

Machine disposal and recycling

- Disconnect and roll up the power cord (this should be performed by a qualified person).
- Disconnect the machine's water inlet hose from the domestic water supply and drain the boilers (this should be performed by a qualified person).
- Pack up and ship/deliver the machine to a certified recycling center.




Buttons functions

Here is some of the additional functions that the electronics offers:

- Volume control of four different espresso drinks per brewing group.
- Time-controlled hot water dispensing. (if available)
- Automatic filling and level control of the boiler.
- Automatic switch off of the heating element if not enough water.
- System supervision through alarms.
- Automatic cleaning of the brew groups.

The control panel is by default programmed with 4 standard drinks (these can be reprogrammed as you wish) and a continuous selection. The first four keys (1 short espresso, 1 Long Espresso, 2 short espresso, 2 Long Espresso) brew the programmed volume and then stop automatically, the fifth key brews continuously until user stops it by pressing button again.

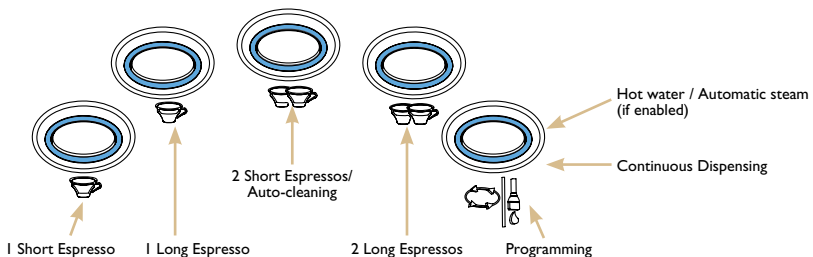

The Continuous Dispensing button performs 3 different functions (depending on length of time pressed):

Machines equipped with display





- Under 1 second: Enables automatic water- or steam-dosing (only on machines without manual taps).
- Between 1 and 8 seconds: Enables Continuous Dispensing (press again to disable).
- Over 8 seconds: Access coffee-dose programming menu (see below).

Machines not equipped with display

- Under 4 seconds: Enables Continuous Dispensing (press again to disable).
- Over 4 seconds: Access coffee-dose programming menu (see below).

Additional button functions

To activate these functions, turn off the machine at the power switch then, while holding down the required button on the left-hand Drink buttons, turn the machine back on.

-  1 Short Espresso. Enable electronic pre-infusion.
-  1 Long Espresso. Disable electronic pre-infusion.
-  2 Short Espresso. Perform auto-cleaning.
-  2 Long Espresso. Turn on/off flashing of button lights (only available on MINI machines).




Note:

In machines equipped with a display, electronic pre-infusion may have to be enabled/disabled from the service programming menu.

Programming the coffee dosage

Use the following steps to program the espresso brew dosages for each Brewing Group and Drink Button (each button can be programmed for a different dosing time if desired):

1. Place a Porta-filter filled with fresh espresso grounds in the Brewing Group.
2. Press the Continuous button  for 4 seconds, all the lights in the keypad will light up and Continuous button will flash, the display will read "Doses Programming Select 30s".
3. Within 30 seconds press the Drink Button to be reprogrammed. All of the button lights will turn off except for the Continuous button and the one being programmed. Water will begin to flow and espresso will begin dispensing.
4. Allow the beverage to dispense until the desired drink volume is reached, then press the Drink Button that is being programmed to stop the water flow. This dosage time will now be stored as the default for that Drink Button.
5. Repeat Steps 1-4 for all Drink Buttons to be reprogrammed.

**Important:**

Use a porta-filter filled with fresh espresso grounds for every new brewing dosage that is programmed.

**Note:**

Programming any of the options on the left-side bank of Drink Buttons (when viewing the machine from the front) automatically programs the dosages on all of the other corresponding Drink Buttons for the other Brewing Group(s). Always program the left-side buttons first, then program the other Drink Buttons to the right afterward to store their specific dosages.


**Note:**

For safety and water conservation, all brewing settings have a maximum dispensing time of 5 minutes.

Machine status

Machines equipped with a display include the following additional functions:

- Automatic daily on/off timer (stand-by function).
- Clock settings (current time and date).
- Promotional display.
- Number of coffees/infusions dispensed.
- Digital boiler-temperature display and control.
- PID-technology boiler-temperature control.
- Programming and settings help system.
- Visual water-softener regeneration alarm.
- Display language selector.

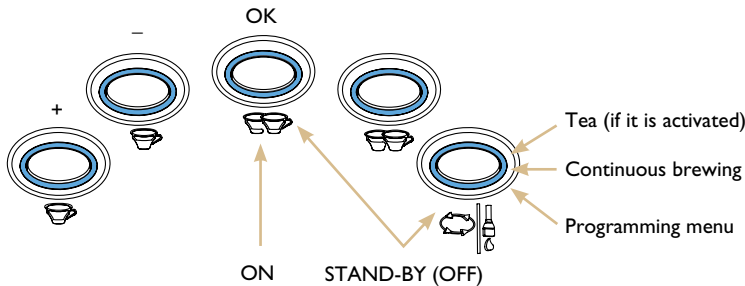




XXX°C hh:mm
SELECT DOSES

fig. 04

OFF hh:mm

fig. 05

The coffee machine has 3 possible statuses:

- **On:**
The machine is operational and ready to make coffee. This is the usual machine status after turning on the power switch (see fig.04).
- **Stand-by:**
The power switch is on, but the display shows "Off" (see fig. 05). This means that the machine is in energy-saving mode. This mode is only entered whilst the machine is on. To enter this mode, press the Continuous Dispensing button , and, without releasing it, simultaneously press the 2 Short Espresso button .
To exit this mode and turn the machine back on, press the 2 Short Espresso Button  again.
- **Off:**
The coffee machine is turned off at the power switch.



Accessing the second menu level

Doses setting
Select within 30s

fig. 06

Set clock

fig. 07











- With the machine on, press the Continuous Dispensing button  on the Left-hand drink buttons and hold it down (for over 8 seconds) until the dose-programming menu is displayed. All the drink buttons lights will be turned on and the Continuous Dispensing button light will flash. The display will be as shown in fig. 06.
- Hold down the Continuous Dispensing button  until the menu displays the “set clock” option (see fig. 07).


This provides access to the second menu level.

Setting the clock: hours, minutes and day

Clock adjust
hh:mm Day

fig. 08

- To set the clock, press the 2 Short Espressos button  whilst the “Set clock” message is displayed.
- The hours values will start flashing. Increase/decrease the values by pressing the 1 Short Espresso  and 1 Long Espresso  buttons (see fig. 08).
With the desired value is reached, accept it the pressing the 2 Short Espressos button .
- The minutes digits will now start flashing. Increase/decrease the values by pressing the 1 Short Espresso  and 1 Long Espresso  buttons.
With the desired value is reached, accept it the pressing the 2 Short Espressos button .
- Set the day of the week in the same way (,  and ).








After setting the values, pressing the 2 Short Espressos button  accesses the auto On/Off menu.

Auto On/Off

Auto On/Off


On: hh.mm

fig. 9

- After accepting the changes made in the “set clock” menu, pressing the 2 Short Espresso button  accesses the coffee machine’s auto on/off programming menu (see fig. 09).
- To change the auto on/off time, increase/decrease the values (hours) using the 1 short espresso  and 1 Long Espresso  buttons whilst the values are flashing. When the desired value is reached, press the 2 Short Espresso button  to accept it. Set the values for the minutes in the same way (,  and ).



Note:

By default, this setting is set as: On: - - : - - (indicating that the function is disabled). Changing the value to anything other than - - : - - enables the function. To leave this function disabled, press the 2 Short Espresso button  whilst the value selected is - - : - -.










Auto On/Off

Off: hh.mm

fig. 10


Closed On
Day

fig. 11

- Whilst the auto off time is flashing, increase/decrease the values by pressing the 1 short espresso  and 1 Long Espresso  buttons. When the desired value is Reached, press the 2 Short Espresso button  to accept it. The minutes values will start flashing. Set these values in the same way as described above (, , and ). After accepting the time, the next menu will be displayed.
- If auto on/off is enabled, it will also be possible to set a day on which the machine will not be turned on automatically. This option will not be displayed if auto on/off is disabled.
- To set the day off (see fig. 11), Increase/decrease the values by pressing the 1 short espresso  and 1 Long Espresso  buttons. When the desired value is reached, press the 2 Short Espresso button  to accept it.




Note:

By default, this setting is set as: On: ----- (indicating that the function is disabled). Changing the value to anything other than ----- enables the function. To leave this function disabled, press the 2 Short Espresso button  whilst the value selected is -----.

Counters

Counters

fig. 12

- To access the counters menu, go to the start of the second menu level (see fig. 07).
- Briefly press the Continuous Dispensing button  to display the “counters” option (see fig. 12). The machine has the following 4 counters:
 - Litres: volume of water dispensed by the machine (indicator used for descaling maintenance cycles).
 - Service: number of coffees dispensed (indicator used for servicing).
 - Number of coffees/infusions dispensed.
 - Number of coffees dispensed per button.

Flow meter
Gr. X

Fault in flow meter X
Flow fault detected in counter X



Time-out alarm
Boiler filling up

Check that the machine is receiving water.



Probe unconnect

Temperature sensor fault

Service
99999999

Service the machine.
To disable the alarm and reset the counter:
Turn off the machine. Simultaneously press and hold down the I Short Espresso  and I Long Espresso  buttons. Turn on the machine.

Change filter
99999999

Regenerate the filter.
To disable the alarm and reset the counter:
Turn off the machine. Simultaneously press and hold down the 2 Short Espressos  and 2 Long Espressos  buttons. Turn on the machine.

- If boiler filling time exceeds the programmed time (2 minutes), all of the Drink buttons lights will flash and the machine will be disabled. To re-enable it, turn the machine off and on again at the power switch.
- If the electronic control panel does not receive a pulse from the flow meter (coffee too fine or flow meter fault) within 5 seconds of pressing one of the espresso buttons, the light for the dose selected will start to flash. To disable it, press the dose button again.
- As an additional safety, all dose settings have a maximum dispensing time of 5 minutes.

The following checks can be carried out by users once the machine has been turned off and disconnected from the power supply. For all other unspecified machine faults, disconnect the machine from the power supply and immediately contact authorised and qualified service personnel.

Problem	Possible cause	Solution
The machine does not start up	The plug is not correctly inserted into the power socket	Check that the plug is correctly inserted and that the power socket is operational.
	The circuit breaker and/or differential are disconnected.	Check that they are connected.
	The cable and/or plug are damaged.	Call service personnel to replace them.
The steam wand does not dispense steam	The steam wand is clogged by milk.	Clean the wand and, if necessary, remove the nozzle and unclog it using a pin or needle.
Water is found underneath the machine	The drainage tube is blocked.	Clean the drainage tube.

Faults produced by limescale

Coffee not dispensed at right temperature:

Heat-exchanger outlet pipes clogged by limescale.

Brewing groups do not dispense water:

Water system is clogged by limescale.

90% of faults are due to limescaling inside the coffee machine (due to not softening the water). To avoid these faults, maintain the water softener regularly.

For the warranty to be valid the conditions for maintenance must have been followed according to our instructions, proper precautions have been taken, and warranty claim has been issued without delay.

The affected equipment shall not be used while awaiting service if there is any risk that the damage or defect could worsen.

The warranty shall not cover consumable supplies such as glassware, or normal maintenance such as cleaning of filters. Additionally, damages of an external nature, such as contaminants in the water, limescaling, incorrect voltage or power surges, and water supply issues such as pressure changes or service disconnection are not covered by this warranty.

The warranty will not cover damages or defects caused by incorrect handling or operation of the appliance.

FOR SERVICE

Please contact your dealer

Your dealer

crem[®]
INTERNATIONAL

www.creminternational.com

Address of CREM international Shanghai:

Building 5, No 521-551 KangYi Road, Pudong New Area, Shanghai, China

Address of CREM international Spain:

C/ Comerç n° 4 – Pol. Ind. Alcodar – Gandía (Valencia – Spain)

MADE IN SPAIN